
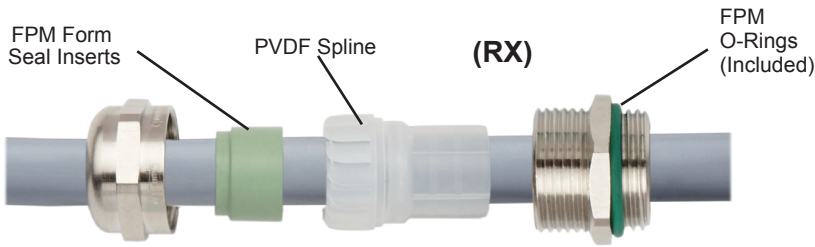



For Non-Armored Cable

Nickel Plated Brass Cable Glands for Hazardous Duty Locations, **PVDF Spline with FPM Insert, V0, UL94, NEMA 6, 150 PSIG, IP 68/69K, 10 BAR**



Part Numbers	Cable Range	Thread Type & Size	Dimensions in Inches (mm)			
			A	B	C	F ₁ /F
 (Standard)	Inches (mm)	Page 59 for Thread Specs	Clearance Hole	Body Length	Thread Length	Wrench Flats
			+ .01" (+.25 mm)	(Dome)	(Standard)	
CD09NA-RX	.16 - .31 (4 - 8)	3/8" NPT	.68 (17.2)	.83 (21)	.59 (15)	.67 (17) / .75 (19)
CD09NR-RX	.08 - .24 (2 - 6)		1/2" NPT	.83 (21.1)	.94 (24)	.51 (13)
CD13NA-RX	.24 - .47 (6 - 12)	3/4" NPT		1.05 (26.7)	.98 (25)	.51 (13)
CD13NR-RX	.20 - .35 (5 - 9)					
CD21NA-RX	.55 - .71 (14 - 18)					
CD21NR-RX	.39 - .63 (10 - 16)					

Elongated Thread is recommend where the Cable Glands has to pass through a thick wall or the application just needs the Extra Thread Length.



PVDF is Ideal for Higher Temperature Applications!

Nickel Plated Brass Cable Glands for Hazardous Duty Locations, **PVDF Spline with FPM Insert, V0, UL94, NEMA 6, 150 PSIG, IP 68/69K, 10 BAR**

Part Numbers		Cable Range	Thread Type & Size	Dimensions in Inches (mm)				
-4°F to 266°F (-20°C to 130°C)	-4°F to 266°F (-20°C to 130°C)			A	B	C	D	F ₁ /F
 (Standard)	 (Elongated)	Inches (mm)	Page 59 for Thread Specs	Clearance Hole	Body Length	Thread Length	Thread Length	Wrench Flats
				+ .01" (+.25 mm)	(Dome)	(Standard)	(Elongated)	
CD12MA-RX	CD12DA-RX	.12 - .26 (3 - 6.5)	M12 x 1.5	.47 (12)	.75 (19)	.26 (6.5)	.39 (10)	.55 (14)
CD12MR-RX	CD12DR-RX	.08 - .20 (2 - 5)		M16 x 1.5	.63 (16)	.83 (21)	.24 (6)	.39 (10)
CD16MA-RX	CD16DA-RX	.16 - .31 (4 - 8)	M16 x 1.5		.63 (16)	.87 (22)	.24 (6)	.39 (10)
CD16MR-RX	CD16DR-RX	.08 - .24 (2 - 6)						
CD17MA-RX	CD17DA-RX	.24 - .39 (6 - 10)	M20 x 1.5	.79 (20)	.91 (23)	.24 (6)	.39 (10)	.87 (22)
CD17MR-RX	CD17DR-RX	.12 - .28 (3 - 7)						
CD20MA-RX	CD20DA-RX	.24 - .47 (6 - 12)	M20 x 1.5	.79 (20)	.94 (24)	.24 (6)	.39 (10)	.94 (24)
CD20MR-RX	CD20DR-RX	.20 - .35 (5 - 9)						
CD22MA-RX	CD22DA-RX	.39 - .55 (10 - 14)	M25 x 1.5	.98 (25)	1.02 (26)	.28 (7)	.47 (12)	1.18 (30)
CD22MR-RX	CD22DR-RX	.28 - .47 (7 - 12)						
CD25MA-RX	CD25DA-RX	.55 - .71 (14 - 18)	M32 x 1.5	1.26 (32)	1.22 (31)	.31 (8)	.47 (12)	1.57 (40)
CD25MR-RX	CD25DR-RX	.39 - .63 (10 - 16)						
CD32MA-RX	CD32DA-RX	.79 - .98 (20 - 25)	M40 x 1.5	1.57 (40)	1.46 (37)	.31 (8)	.59 (15)	1.97 (50)
CD32MR-RX	CD32DR-RX	.51 - .79 (13 - 20)						
CD40MA-RX	CD40DA-RX	.87 - 1.26 (22 - 32)						
CD40MR-RX	CD40DR-RX	.79 - 1.02 (20 - 26)						